



# HighwayGuard™ TL4 Standard Steel Safety Barrier

## Data Sheet

Portable Steel Safety Barrier

**MASH TL-3 COMPLIANT**

**MASH TL-4 COMPLIANT**

### Features & Benefits

- Latest generation MASH 16 TL-3 & TL4 barrier
- Single 6m barrier module can be installed in 6, 12 or even 18m lengths
- Optional angled barrier and T-Connector components
- Increased efficiencies in transportation and installation - minimum 192m per 40' container or truck flatbed, with faster on-site installation
- Narrow footprint, just 0.54m wide
- Rapid installation with flexible deployment, reconfiguration and removal made easy using the patented T-Connector
- Optional 2.5, 5 and 10° angle T-Connectors and radius sections- smoothly deal with challenging site conditions (eg, roundabouts or intersections).
- Wheelset option - ability to add wheels for easy barrier mobility
- Integrated mounting points - quick attachment of screens, fencing, signs or other ancillary traffic equipment
- Compact dimensions and weight keep logistics costs down and the optional angled sections and T-Connectors ensure ability to smoothly handle difficult geometries
- Integral T-top designed in - providing exceptional TL-3 & TL-4 performance without additional components




HighwayGuard™ MASH 16 TL-3 & TL-4 fully tested and compliant at 58m anchor spacing, providing rapid deployment with less anchoring.

The simple barrier system uses a single 6m module with integrated anchoring, drainage and forklift access points. The integral T-top design provides exceptional MASH TL-3 and TL-4 performance without the need for additional components.

The unique patented T-Connector can be left connected to one piece of barrier. Installation only requires another piece of barrier to be connected (in any direction). Any later barrier alterations, or maintenance works are quick and simple.

Can be transitioned to existing BG800® steel barrier where required.

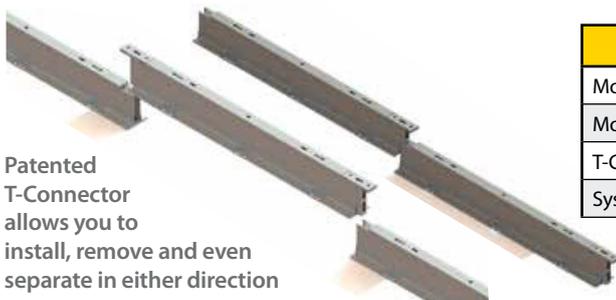

Patented T-Connector allows you to install, remove and even separate in either direction

Specifications	
Module Length	6m
Module Weight	552kg
T-Connector	43kg
System Weight	99 kg/m

