


Copper-Bonded Earth Rod

EARTHING | GROUND | ELECTRICAL | GROUND RODS

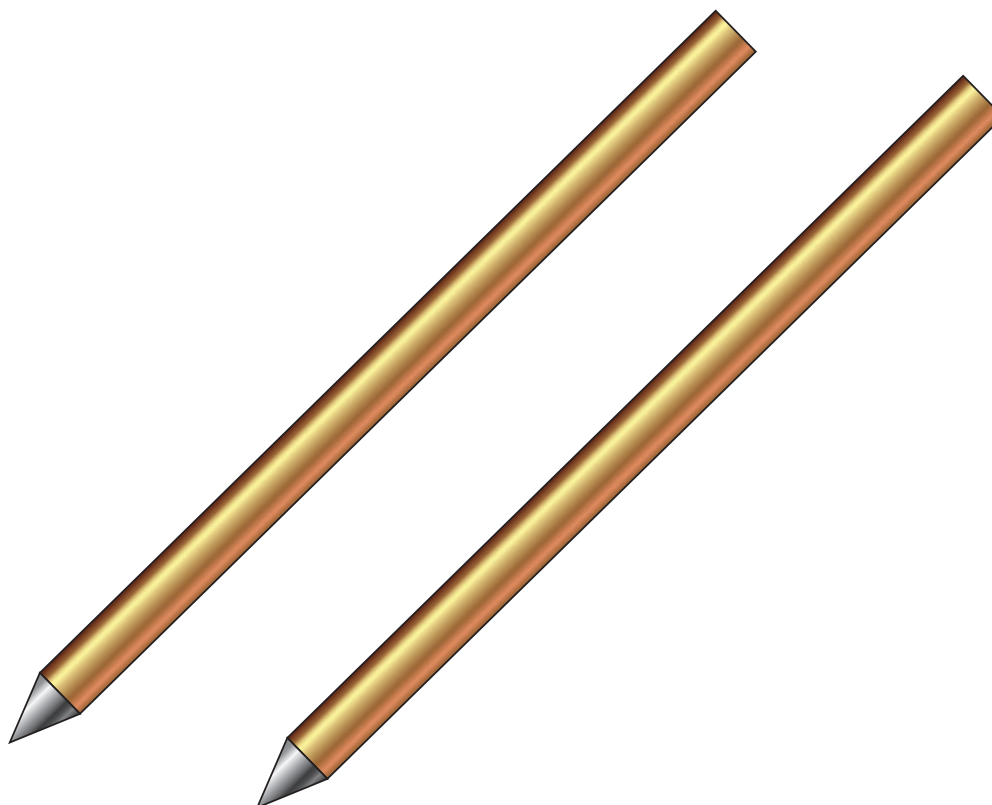

Features:

- 99.9% pure electrolytic copper coating
- Molecular bond to nickel-sealed high strength steel core
- Rods have a high carbon steel core and tip that provide superior strength when driving
- Copper coating will not crack when bent or tear when driven
- Minimum copper coating of 10mm on rods listed to UL[®] 467

Specifications:

- Tensile Strength: 552 Mpa Min
- Ground Rod Diameter, Nominal: 1/2"
- Ground Rod Diameter, Actual (Ø): 12.7mm
- Plating thickness: 254µm
- UPC Label: No
- Standard Packaging Quantity: 5pc

Part #	Size	Material Type	Weight
EB131500	1/2" X 1500mm	Copper clad steel	3 kg

For rods to be listed to UL[®] 467, they must be at least 8' (2.43 m) in length.
IEC[®] EN 62561-2 supercedes EN 50164-2.