



WebGrip™ Conveyor Channel

WebGrip Conveyor channels are manufactured with a 10mm profile, providing maximum non-slip properties under foot on conveyor walkways, even with a steep incline.

- Bright Safety Yellow non-slip coating for maximum visibility
- Alternative to 10mm x 10mm square cleats

Product Code	Description	Fixing Holes
CBV1	WebGrip Conveyor Channel 10x50x580	2
CBV2	WebGrip Conveyor Channel 10x50x730	2
CBV3	WebGrip Conveyor Channel 10x50x880	2
CBV4	WebGrip Conveyor Channel 10x50x1030	3
CBV5	WebGrip Conveyor Channel 10x50x1180	3

Product Code	Description	Extra Description
C014MG	WebGrip Clip Set MG	Bottom Clip/nut plus Phillip Screw Cheese Head M6x60 MS Gal
C032SM	WebGrip Clip Set SS	Bottom Clip/nut plus Phillip Screw Cheese Head M6x60 SS

Fixing Instructions

- If electing to drill your own fixing holes, mark hole positions and drill through from the underside surface
- Ensure there are sufficient holes to anchor the conveyor channel firmly to the base structure


Conveyor channels should be spaced in line with the requirements of AS1657-2013 Clause 5.3.3

Cleats shall be of metal, not less than 10mm x10mm and evenly spaced at the following intervals:

a) At slope angles >100 to ≤150	450mm
b) At slope angles >150 to ≤180	400mm
c) At slope angles >180	350mm

TOP ELEVATION

SCALE 1:5

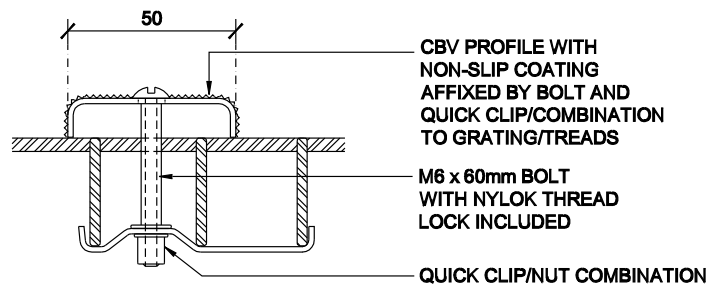

COMPONENTS

SCALE 1:2



APPLICATION

NOT TO SCALE